

PV L1 SERIES | SINGLE PHASE & SINGLE MPPT

PV 2/3/3.6KTL-S1/G2P

Application: Residential Use

PV Inverter



Wide MPPT
voltage range



Fanless and
noiseless



Shade
smart



IP65
Protection



Remote
control



Quick
commissioning



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 2KTL-S1/G2P	PV 3KTL-S1/G2P	PV 3K6TL-S1/G2P
Efficiency			
Max. Efficiency		97.8%	
European Efficiency	96.5%	96.8%	96.8%
Input(PV)			
Max. Input Voltage		500V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		360V	
Max. Input Current		15A	
Max.Short Circuit Current		20A	
Start Input Voltage		70V	
MPPT Operating Voltage Range		50V-490V	
Max. Number of PV Strings		1	
No. of MPPTs		1	
Output(Grid)			
Rated AC Active Power	2,000W	3,000W	3,600W
Max. AC Apparent Power	2,200VA	3,300VA	3,600VA
Max. AC Output Current	10A	15A	16A
Rated AC Voltage	220V/230V, L+N+PE		
AC Voltage Range①	160V-300V (Adjustable)		
Rated Grid Frequency	50Hz / 60Hz		
Grid Frequency Range②	45Hz-55Hz / 55Hz-65Hz (Adjustable)		
THDI	<3% (Rated Power)		
DC Current Injection	<0.5%In		
Power Factor	>0.99 Rated power (Adjustable 0.8 LD-0.8 LG)		
Protection			
DC Switch		Yes	
Anti-Islanding Protection		Yes	
AC Overcurrent Protection		Yes	
AC Short Circuit Protection		Yes	
DC Reverse Protection		Yes	
Surge Arrester	DC Type III(Type II optional) / AC Type III(Type II optional)		
Insulation Detection		Yes	
Leakage Current Protection		Yes	
General			
Topology		Transformerless	
IP Rating		IP65	
Night Self Consumption		<1W	
Cooling		Natural cooling	
Operating Temperature Range		-25°C-60°C	
Relative Humidity Range		0-100%	
Max. Operating Altitude		4000m	
Dimensions (W*H*D)		320mm*344mm*137mm	
Weight		6.5Kg	
HMI & COM			
Display		Wireless & APP+LED, LCD (Optional)	
Communication		Optional: WiFi / GPRS / RS485 / LAN	
Certification			
Safety		IEC62109-1, IEC62109-2	
Grid Code		DE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206001/206002-1, IEC 61727/62116, ORDINANCE n°140 2022, IEEE 1547, UL 1741, AS 4777, VDE 0126-1	
Warranty			
Country of Manufacture		10 Years China	

- Remarks:**
- ①②The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PV L1 SERIES | SINGLE PHASE & DUAL MPPT

PV 4/5/6KTL-D1/G2P

Application: Residential Use

PV Inverter



150% DC input oversizing



Fanless and noiseless



Shade smart



Remote control



Easy installation



www.primevolt.com.au

PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

Model	PV 4KTL-D1/G2P	PV 5KTL-D1/G2P	PV 6KTL-D1/G2P
Efficiency			
Max. Efficiency		98.2%	
European Efficiency	97.0%	97.3%	97.4%
Input(PV)			
Max. Input Voltage		550V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		360V	
Max. Input Current		30A (2*15A)	
Max.Short Circuit Current		40A (2*20A)	
Start Input Voltage		90V	
MPPT Operating Voltage Range		70V-540V	
Max. Number of PV Strings		2 (1/1)	
No. of MPPTs		2	
Output(Grid)			
Rated AC Active Power	4,000W	5,000W	6,000W
Max. AC Apparent Power	4,400VA	5,500VA	6,000VA
Max. AC Output Current	20A	25A	27.3A
Rated AC Voltage		220V/230V, L+N+PE	
AC Voltage Range①		160V-300V (Adjustable)	
Rated Grid Frequency		50Hz / 60Hz	
Grid Frequency Range②		45Hz-55Hz / 55Hz-65Hz (Adjustable)	
THDI		<3% (Rated Power)	
DC Current Injection		<0.5%In	
Power Factor		>0.99 Rated power (Adjustable 0.8 LD-0.8 LG)	
Protection			
DC Switch		Yes	
Anti-Islanding Protection		Yes	
AC Overcurrent Protection		Yes	
AC Short Circuit Protection		Yes	
DC Reverse Protection		Yes	
Surge Arrester		DC Type III(Type II optional) / AC Type III(Type II optional)	
Insulation Detection		Yes	
Leakage Current Protection		Yes	
General			
Topology		Transformerless	
IP Rating		IP65	
Night Self Consumption		< 1W (Standard)	
Cooling		Natural cooling	
Operating Temperature Range		-25°C-60°C	
Relative Humidity Range		0-100%	
Max. Operating Altitude		4000m	
Dimensions (W*H*D)		350mm*347mm*137mm	
Weight		8.5Kg	
HMI & COM			
Display		Wireless & APP+LED, LCD (Optional)	
Communication		Optional: WiFi / GPRS / RS485 / LAN	
Certification			
Safety		IEC62109-1, IEC62109-2	
Grid Code		DE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206001/206002-1, IEC 61727/62116, ORDINANCE n°140 2022, IEEE 1547, UL 1741, AS 4777, VDE 0126-1	
Warranty			
Country of Manufacture		10 Years China	

- Remarks :**
- ①②The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PV L1 SERIES | SINGLE PHASE & DUAL MPPT

PV 7/8/10KTL-D1P

Application: Residential Use

PV Inverter



150% DC input oversizing



Compatible large PV panels



Arc-fault circuit interrupter Optional



Shade smart



www.primevolt.com.au

PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

Model	PV 7KTL-D1P	PV 8KTL-D1P	PV 10KTL-D1P
Efficiency			
Max. Efficiency		98.2%	
European Efficiency		97.5%	
Input (PV)			
Max. Input Voltage		600V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		360V	
Max. Input Current	40A (2*20A)		50A (2*15A+20A)
Max.Short Circuit Current	52A (2*26A)		66A (2*20A+26A)
Start Input Voltage		90V	
MPPT Operating Voltage Range		60V-540V	
Max. Number of PV Strings	2 (1/1)		3 (2/1)
No. of MPPTs		2	
Output (Grid)			
Rated AC Active Power	7,000W	8,000W	10,000W
Max. AC Apparent Power	7,700VA	8,800VA	10,000VA
Max. AC Output Current	35A	40A	45.5A
Rated AC Voltage		220V/230V, L+N+PE	
AC Voltage Range ^①		160V-300V (Adjustable)	
Rated Grid Frequency		50Hz / 60Hz	
Grid Frequency Range ^②		45Hz-55Hz / 55Hz-65Hz (Adjustable)	
THDI		<3% (Rated Power)	
DC Current Injection		<0.5%In	
Power Factor		>0.99 Rated power (Adjustable 0.8 LD-0.8 LG)	
Protection			
DC Switch		Yes	
Anti-Islanding Protection		Yes	
AC Overcurrent Protection		Yes	
AC Short Circuit Protection		Yes	
DC Reverse Protection		Yes	
Surge Arrester		DC Type III(Type II optional) / AC Type III(Type II optional)	
Insulation Detection		Yes	
Leakage Current Protection		Yes	
General			
Topology		Transformerless	
IP Rating		IP65	
Night Self Consumption		< 1W (Standard)	
Cooling		Natural cooling	
Operating Temperature Range		-25°C-60°C	
Relative Humidity Range		0-100%	
Max. Operating Altitude		4000m	
Dimensions (W*H*D)		400mm*450mm*170mm	
Weight		16Kg	
HMI & COM			
Display		Wireless & APP+LED, LCD (Optional)	
Communication		Optional: WiFi / GPRS / RS485 / LAN	
Certification			
Safety		IEC62109-1, IEC62109-2	
Grid Code		DE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206001/206002-1, IEC 61727/62116, ORDINANCE n°140 2022, IEEE 1547, UL 1741, AS 4777, VDE 0126-1	
Warranty			
Country of Manufacture		10 Years China	

Remarks:

- ^{①②}The range of output voltage and frequency may vary depending on different grid codes.
- Specifications are subject to change without advanced notice.

PV H3 SERIES | THREE PHASE & DUAL MPPT

PV 5/6/8KTL-D3/G2

Application: Residential & Small C&I use

PV Inverter



110% AC Output overloading



Light weight & easy to install



Shade smart



More energy output & shorter payback



Multiple I/O connect



Arc-fault circuit interrupter Optional



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 5KTL-D3/G2	PV 6KTL-D3/G2	PV 8KTL-D3/G2
Efficiency			
Max. Efficiency		98.2%	
European Efficiency		97.8%	
Input (PV)			
Max. Input Voltage		1100V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		620V	
Max. Input Current		2*15A	
Max.Short Circuit Current		2*20A	
Start Input Voltage		180V	
MPPT Operating Voltage Range		160V-1000V	
Max. Number of PV Strings		2 (1/1)	
No. of MPPTs		2	
Output (Grid)			
Rated AC Active Power	5000W	6,000W	8,000W
Max. AC Apparent Power	5500VA	6,600VA	8,800VA
Max. AC Output Current	3*8.4A	3*10.1A	3*13.4A
Rated AC Voltage	380V / 400V / 415V, 3W+N+PE		
AC Voltage Range ^①	260V-510V (Adjustable)		
Rated Grid Frequency	50Hz / 60Hz		
Grid Frequency Range ^②	45Hz-55Hz / 55Hz-65Hz (Adjustable)		
THDI	<3%@Rated Power		
DC Current Injection	<0.5%@Rated Current		
Power Factor	> 0.99 Rated power (Adjustable 0.8 LD - 0.8 LG)		
Protection			
DC Switch	Yes		
Anti-Islanding Protection	Yes		
AC Overcurrent Protection	Yes		
AC Short Circuit Protection	Yes		
DC Reverse Protection	Yes		
Surge Arrester	DC Type III(Type II optional) / AC Type III(Type II optional)		
Insulation Detection	Yes		
Leakage Current Protection	Yes		
General			
Topology	Transformerless		
IP Rating	IP66		
Night Self Consumption	< 1W (Standard)		
Cooling	Natural cooling		
Operating Temperature Range	-25°C-60°C		
Relative Humidity Range	0-100%		
Max. Operating Altitude	4000m		
Dimensions (W*H*D)	398mm*460mm*190mm		
Weight	16.8Kg		
HMI & COM			
Display	Wireless & APP +LED, LCD (Optional)		
Communication	RS485, Optional: WiFi / GPRS / LAN		
Certification			
Safety	IEC62109-1, IEC62109-2		
Grid Code	VDE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206006/206007-1, RD 1699/661&413, IEC 61727/62116, AS4777.2		
Warranty	10 Years		
Country of Manufacture	China		

- Remarks :**
- ①②The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PV H3 SERIES | THREE PHASE & DUAL MPPT

PV 10/15KTL-D3/G2P, PV 17/20/22/25/30KTL-D3/G2

Application: Residential & Small and Medium C&I use



IP66
Protection



Shade
smart



150% DC input
oversizing and 110%
AC Output overloading



Multiple I/O
connect



Compatible large
PV panels



Arc-fault circuit
interrupter Optional



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 10KTL-D3/G2P	PV 15KTL-D3/G2P	PV 17KTL-D3/G2	PV 20KTL-D3/G2	PV 22KTL-D3/G2	PV 25KTL-D3/G2	PV 30KTL-D3/G2	
Efficiency								
Max. Efficiency	98.4%							
European Efficiency	97.8%						98.0%	
Input (PV)								
Max. Input Voltage	1100V							
Max. PV Configuration (STC)	150%							
Rated Input Voltage	620V							
Max. Input Current	15A+30A					2*30A	40A/30A	
Max. Short Circuit Current	20A+40A					2*40A	50A/37.5A	
Start Input Voltage	180V							
MPPT Operating Voltage Range	160V-1000V							
Max. Number of PV Strings	3 (1/2)					4 (2/2)		
No. of MPPTs	2							
Output (Grid)								
Rated AC Active Power	10,000W	15,000W	17,000W	20,000W	22,000W	25,000W	30,000W	
Max. AC Apparent Power	11,000VA	16,500VA	18,700VA	22,000VA	24,200VA	27,500VA	33,000VA	
Max. AC Output Current	3*16.8A	3*25.3A	3*28.6A	3*33.7A	3*37A	3*39.8A	3*50.2A	
Rated AC Voltage	380V / 400V / 415V, 3W+N+PE							
AC Voltage Range ^①	260V-510V (Adjustable)							
Rated Grid Frequency	50Hz / 60Hz							
Grid Frequency Range ^②	45Hz-55Hz / 55Hz-65Hz (Adjustable)							
THDI	<3%@Rated Power							
DC Current Injection	<0.5%@Rated Current							
Power Factor	> 0.99 Rated power (Adjustable 0.8 LD - 0.8 LG)							
Protection								
DC Switch	Yes							
Anti-Islanding Protection	Yes							
AC Overcurrent Protection	Yes							
AC Short Circuit Protection	Yes							
DC Reverse Protection	Yes							
Surge Arrester	DC Type III(Type II optional) / AC Type III(Type II optional)							
Insulation Detection	Yes							
Leakage Current Protection	Yes							
General								
Topology	Transformerless							
IP Rating	IP66							
Night Self Consumption	<1W							
Cooling	Natural cooling						Fan cooling	
Operating Temperature Range	-25°C-60°C							
Relative Humidity Range	0-100%							
Max. Operating Altitude	4000m							
Dimensions (W*H*D)	398mm*460mm*190mm							
Weight	18.7Kg	20.1Kg				20.3Kg		
HMI & COM								
Display	Wireless & APP +LED, LCD (Optional)							
Communication	RS485, Optional: WiFi / GPRS / LAN							
Certification								
Safety	IEC62109-1, IEC62109-2							
Grid Code	VDE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206006/206007-1, RD 1699/661&413, IEC 61727/62116, AS4777.2							
Warranty	10 Years							
Country of Manufacture	China							

- Remarks:**
- ^①^②The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PV H3 SERIES | THREE PHASE & MULTIPLE MPPT

PV 30/40KTL-T3/G2, PV 50KTL-Q3/G2

Application: Commercial & Industrial Sites

PV Inverter



DC/AC SPD
Type II



Shade
smart




30KW natural cooling
and noiseless



IP66
Protection



MPPT current
detection



Night SVG optional,
I/V detection optional,
Integrated PID optional



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 30KTL-T3/G2	PV 40KTL-T3/G2	PV 50KTL-Q3/G2
Efficiency			
Max. Efficiency		98.5%	
European Efficiency	98.0%	98.0%	97.9%
Input (PV)			
Max. Input Voltage		1100V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		620V	
Max. Input Current	40A+2*32A	40A+2*32A	40A+3*32A
Max.Short Circuit Current	50A+2*45A	50A+2*45A	50A+3*45A
Start Input Voltage		200V	
MPPT Operating Voltage Range		180V-1000V	
Max. Number of PV Strings	2/2/2	2/2/2	2/2/2/2
No. of MPPTs	3	3	4
Output (Grid)			
Rated AC Active Power	30000W	40000W	50000W
Max. AC Apparent Power	33400VA	44500VA	55600VA
Max. AC Output Current	51A	67.4A	84.2A
Rated AC Voltage		380V/400V/415V, 3W+N+PE or 3W+PE	
AC Voltage Range ^①		320V-520V (Adjustable)	
Rated Grid Frequency		50Hz / 60Hz	
Grid Frequency Range ^②		45-55Hz / 55-65Hz (Adjustable)	
THDI		<3% (Rated Power)	
DC Current Injection		<0.5%In	
Power Factor		> 0.99 Rated power (Adjustable 0.8 LD - 0.8LG)	
Protection			
DC Switch		Yes	
Anti-Islanding Protection		Yes	
AC Overcurrent Protection		Yes	
AC Short Circuit Protection		Yes	
DC Reverse Protection		Yes	
Surge Arrester		DC Type II / AC Type II	
Insulation Detection		Yes	
Leakage Current Protection		Yes	
PV String Monitoring		Optional	
Consumption Monitoring		Optional	
General			
Topology		Transformerless	
IP Rating		IP66	
Night Self Consumption		<5W (Standard)	
Cooling	Natural cooling	Fan cooling	
Operating Temperature Range		-25°C-60°C	
Relative Humidity Range		0-100%	
Max. Operating Altitude		4000m	
Dimensions (W*H*D)		635mm*530mm*224mm	
Weight	36Kg	40Kg	42Kg
HMI & COM			
Display		Wireless & APP+LED, LCD (Optional)	
Communication		RS485, Optional: WiFi / GPRS / LAN	
Certification			
Safety		IEC62109-1, IEC62109-2	
Grid Code	VDE-AR-N 4105, EN 50549-1, CEI 0-21, UNE 206006/206007-1, RD 1699/661&413, IEC 61727/62116, AS4777.2		
Warranty	10 Years		
Country of Manufacture	China		

- Remarks:**
- ^{①②}The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PV H3 SERIES | THREE PHASE & MULTIPLE MPPT

PV 100/110KTL-M3, PV 125KTL-MH3

Application: Commercial & Industrial Sites

PV Inverter



Replaceable
DC/AC SPD Type II



Shade
smart




Internal temperature
humidity monitoring



IP66
Protection



MPPT current
detection



Night SVG optional,
I/V detection optional,
Integrated PID optional



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 100KTL-M3	PV 110KTL-M3	PV 125KTL-MH3
Efficiency			
Max. Efficiency	98.5%	98.6%	98.8%
European Efficiency	98.0%	98.2%	98.4%
Input (PV)			
Max. Input Voltage		1100V	
Max. PV Configuration (STC)		150%	
Rated Input Voltage		620V	
Max. Input Current	3*40A+5*32A		3*40A+6*32A
Max. Short Circuit Current	3*50A+5*45A		3*50A+6*45A
Start Input Voltage/ Min. Operating Voltage		250V / 200V	
MPPT Operating Voltage Range		200V-1000V	
Max. Number of PV Strings	16 (8*2)		18 (9*2)
No. of MPPTs	8		9
Output (Grid)			
Rated AC Active Power	100,000W	110,000W	125,000W
Max. AC Apparent Power	111,000VA	123,000VA	139,000VA
Max. AC Output Current	3*168.8A	3*187A	3*167.3A
Rated AC Voltage	400V, 3W+N+PE or 3W+PE		480V, 3W+N+PE or 3W+PE
AC Voltage Range*	320V-520V (Adjustable)		408V-550V (Adjustable)
Rated Grid Frequency	50Hz / 60Hz		
Grid Frequency Range**	45Hz-55Hz / 55Hz-65Hz (Adjustable)		
THDI	<3% (Rated Power)		
DC Current Injection	<0.5%In		
Power Factor	> 0.99 Rated power (Adjustable 0.8 LD - 0.8 LG)		
Protection			
DC Switch	Yes		
Anti-Islanding Protection	Yes		
AC Overcurrent Protection	Yes		
AC Short Circuit Protection	Yes		
DC Reverse Protection	Yes		
Surge Arrester	DC Type II / AC Type II		
Insulation Detection	Yes		
Leakage Current Protection	Yes		
AFCI	Optional		
PID Recovery	Optional		
PV String Monitoring	Optional		
Consumption Monitoring	Optional		
General			
Topology	Transformerless		
IP Rating	IP66		
Night Self Consumption	< 10W (Standard)		
Cooling	Fan cooling		
Operating Temperature Range	-25°C-60°C		
Relative Humidity Range	0-100%		
Max. Operating Altitude	4000m		
Dimensions (W*H*D)	936mm*678mm*365mm		
Weight	91.5Kg		92Kg
HMI & COM			
Display	Wireless & APP +LED, LCD (Optional)		
Communication	RS485, Optional: WiFi / GPRS / LAN		
Certification			
Safety	IEC62109-1, IEC62109-2		
Grid Code	EN 50549-1/-2, IEC 61727/62116, VDE-AR-N 4105, CEI 0-21/16, UNE 206006/206007-1, UNE 217001, AS 4777		
Warranty	10 Years		
Country of Manufacture	China		

Remarks:

- The range of output voltage and frequency may vary depending on different grid codes.
- Specifications are subject to change without advanced notice.

HB L1 SERIES | SINGLE PHASE HYBRID INVERTER

PV 4.6/5/6KHB-120

Energy Storage Inverter



200% PV overload



Fanless design, long lifespan



Export control (zero export)



<10 ms UPS-level switching



Up to 120A max. charging/ discharging current



100% load backup



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 4K6HB-120	PV 5KHB-120	PV 6KHB-120
Efficiency			
Max. Efficiency (PV to AC)		97.3%	
Max. Efficiency (BAT to AC)		94.3%	
PV String Input Data			
Max. Input Power		9,000W	
Max. PV Configuration (STC)		200%	
Max. Input Voltage		550V	
Start-up Voltage		90V	
MPPT Operating Voltage Range		70V-540V	
Max. Input Current per MPPT		15A/15A	
Max. Short Circuit Current per MPPT		20A/20A	
Number of MPP Trackers		2	
Number of String per MPPT		1/1	
Battery Input/output Data			
Battery Type		Lithium-ion, Lead-acid	
Nominal Battery Voltage		48V	
Battery Voltage Range		40V-65V	
Max. Continuous charging/Discharging Current		120A/120A	
Max. Charging/Discharging Power		6,000W/6,000W	
AC Output Data (On-grid)			
Nominal AC Output Power	4,600W	5,000W	6,000W
Rated Output Apparent Power	4,600VA	5,000VA	6,000VA
Max. AC Apparent Power	4,600VA	5,500VA	6,000VA
Max.AC Output Power (PF=1)	4,600W	5,500W	6,000W
Max. AC Output Current	22A	25A	27.2A
Nominal Output Voltage	220V/230V/240V, L+N+PE		
Output Voltage Range	150V-300V (Adjustable)		
Nominal AC Grid Frequency	50Hz/60Hz		
Grid Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)		
Power Factor	> 0.99 @rated power (Adjustable 0.8 LD - 0.8 LG)		
Max. Total Harmonic Distortion	<3% (Rated Power)		
AC Output Data (Back up)			
Nominal Output Power	4,600W	5,000W	6,000W
Nominal Output Current	20A	21.7A	26A
Peak Output Apparent Power (>1s)	6,900VA	7,500VA	9,000VA
Nominal Output Voltage	220V/230V/240V, L+N+PE		
Nominal Output Frequency	50Hz/60Hz		
Transfer Time	<10ms		
Output THDV	<3% @100% R Load		
Protection			
Protection Category	Class I		
DC Switch	Yes		
Anti-Islanding Protection	Yes		
AC Over Current Protection	Yes		
AC Over Voltage Protection	Yes		
AC Short Circuit Protection	Yes		
DC Reverse Protection	Yes		
Surge Protection	DC Type III, AC Type III		
PV Insulation Resistance Detection	Yes		
Leakage Current Protection	Yes		
GEN	Optional		
General Data			
Max. Operating Altitude	4000m (>2000m derating)		
Ingress Protection Rating	IP65		
Operating Temperature Range	-25°C~60°C (>45°C derating)		
Relative Humidity	0~100%		
Cooling Method	Natural Cooling		
Mounting Method	Wall bracket		
Advanced Parallel	Up to 9 Pcs		
Dimension (W*H*D)	570mm*495mm*175mm		
Weight	25Kg		
PV Connection	MC4/H4		
Battery Connection	Dedicated DC connector		
AC Connection	Dedicated AC connector		
HMI & COM			
Display	LED+APP		
Communication Interface	RS485/CAN (for BMS), RS485, USB, DRM/RS485 (for Meter), Optional: Wi-Fi/GPRS/LAN		
Certification			
Grid	VDE-AR-N4105, IEC 61727/62116, AS 4777.2, EN 50549-1, C10/11, G99/G100, CEI 0-21, NRS 097-2-1, RD 1699/661/413		
Safety	IEC 62109-1&2, IEC 62477-1		
Warranty	10 Years		
Country of Manufacture	China		

- Remarks:**
- The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.


HB L1 SERIES | SINGLE PHASE HYBRID INVERTER

PV 8KHB-180, PV 9K99HB-210

Energy Storage Inverter



200% PV overload



Max. 22A DC input current per string



Up to 210A max. charging/ discharging current



Support smart load/ generator



<10 ms UPS-level switching



100% load backup



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 8KHB-180	PV 9K99HB-210
Efficiency		
Max. Efficiency (PV to AC)		98.0%
Max. Efficiency (BAT to AC)		94.5%
PV String Input Data		
Max. Input Power	12,000W	15,000W
Max. PV Configuration (STC)		200%
Max. Input Voltage		600V
Start-up Voltage		90V
MPPT Operating Voltage Range		70V-540V
Max. Input Current per MPPT		30A/22A/22A
Max. Short Circuit Current per MPPT		40A/30A/30A
Number of MPP Trackers		3
Number of String per MPPT		2/2/2
Battery Input/output Data		
Battery Type	Lithium-ion,Lead-acid	
Nominal Battery Voltage	48V	
Battery Voltage Range	40V-64V	
Max. Charging/Discharging Current	210A/180A	210A/210A
Max. Charging/Discharging Power	10,000W/8,000W	10,000W/10,000W
AC Output Data (On-grid)		
Nominal AC Output Power	8,000W	9,990W
Rated Output Apparent Power	8,000VA	9,990VA
Max. AC Apparent Power	8,800VA	10,990VA
Max. AC Output Power (PF=1)	8,800W	10,990W
Max. AC Output Current	40A	50A
Nominal Output Voltage	220V/230/240V, L+N+PE	
Output Voltage Range	150V-300V (Adjustable)	
Nominal AC Grid Frequency	50Hz/60Hz	
Grid Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)	
Power factor	> 0.99 @rated power (Adjustable 0.8 LD - 0.8 LG)	
Max. Total Harmonic Distortion	<3% (Rated Power)	
AC Output Data (Back up)		
Nominal Output Power	8,000W	9,990W
Nominal Output Current	34.8A	43.5A
Peak Output Apparent Power (>1s)	16,000VA	20,000VA
Nominal Output Voltage	220V/230/240V, L+N+PE	
Nominal Output Frequency	50Hz/60Hz	
Transfer Time	<10ms	
Output THDV	<3% @100% R Load	
Protection		
Protection Category	Class I	
DC Switch	Yes	
Anti-Islanding Protection	Yes	
AC Over Current Protection	Yes	
AC Over Voltage Protection	Yes	
AC Short Circuit Protection	Yes	
DC Reverse Protection	Yes	
Surge Protection	DC Type II, AC Type II	
PV Insulation Resistance Detection	Yes	
Leakage Current Protection	Yes	
AFCI	Optional	
GEN	Yes	
General Data		
Max. Operating Altitude	4000m (>2000m derating)	
Ingress Protection Rating	IP65	
Operating Temperature Range	-25°C~60°C (>45°C derating)	
Relative Humidity	0~100%	
Cooling Method	Fan Cooling	
Mounting Method	Wall bracket	
Advanced Parallel	Up to 9 Pcs	
Dimension (W*H*D)	420mm*800mm*240mm	
Weight	39Kg	
PV Connection	Terminals	
HMI & COM		
Display	LED+APP, LCD (Optional)	
Communication Interface	RS485/CAN (for BMS), DRM/RS485 (for Meter), RS485 Optional: Wi-Fi/GPRS/LAN	
Certification		
Grid	IEC 61727/62116, AS 4777.2, NRS 097-2-1	
Safety	IEC 62109-1&2	
EMC	EN 61000	
Warranty	10 Years	
Country of Manufacture	China	

- Remarks:**
- The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

HB L3 SERIES | THREE PHASE HYBRID INVERTER

PV 5/6/8/10KHB-D3



200% PV overload



98.4% maximum system efficiency



<10 ms UPS-level switching



150% unbalanced load



Wide battery voltage from 150V to 600V



100% load backup



www.primevolt.com.au

PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au


Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

Model	PV 5KHB-D3	PV 6KHB-D3	PV 8KHB-D3	PV 10KHB-D3
Efficiency				
Max. Efficiency (PV to AC)	98.2%		98.4%	
Max. Efficiency (BAT to AC)	98.0%			
PV String Input Data				
Max. Input Power	9,000W		15,000W	
Max. PV Configuration (STC)	200%			
Max. Input Voltage	1000V			
Start-up Voltage	150V			
MPPT Operating Voltage Range	160V-950V			
Max. Input Current per MPPT	15A/15A		20A/30A	
Max. Short Circuit Current per MPPT	20A/20A		30A/40A	
Number of MPP Trackers	2			
Number of String per MPPT	1/1		1/2	
Battery Input/output Data				
Battery Type	Lithium-ion, Lead-acid			
Nominal Battery Voltage	250V-600V			
Battery Voltage Range	150V-600V			
Max. Charging/Discharging Current	25A/25A	25A/25A	50A/50A	50A/50A
Max. Charging/Discharging Power	9,000W/5,800W	9,000W/7,000W	15,000W/9,100W	15,000W/11,300W
AC Output Data (On-grid)				
Nominal AC Output Power	5,000W	6,000W	8,000W	10,000W
Rated Output Apparent Power	5,000VA	6,000VA	8,000VA	10,000VA
Max. AC Apparent Power	5,500VA	6,600VA	8,800VA	11,000VA
Max. AC Output Power (PF=1)	5,500W	6,600W	8,800W	11,000W
Max. AC Output Current	3*8.3A	3*10A	3*13.3A	3*16.7A
Max. Single Phase Output Power	2,500W	3,000W	4,000W	5,000W
Max. AC Input Power	15,000VA			
Max. Input Current	3*25A			
Nominal Output Voltage	380V/400V/415V, 3W+N+PE			
Output Voltage Range	260V-520V (Adjustable)			
Nominal AC Grid Frequency	50Hz/60Hz			
Grid Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)			
Power Factor	> 0.99 @rated power (Adjustable 0.8 LD - 0.8 LG)			
Max. Total Harmonic Distortion	<5% (Rated Power)			
AC Output Data (Back up)				
Nominal Output Power	5,000W	6,000W	8,000W	10,000W
Nominal Output Current	3*7.6A	3*9.1A	3*12.2A	3*15.2A
Max. Single Phase Power	2,500W	3,000W	4,000W	5,000W
Peak Output Apparent Power (5min)	6,000VA	7,200VA	9,600VA	12,000VA
Peak Output Apparent Power (10s)	7,500VA	9,000VA	12,000VA	15,000VA
Nominal Output Voltage	380V/400V/415V, 3W+N+PE			
Nominal Output Frequency	50Hz/60Hz			
Transfer Time	10ms			
Output THDV	<3% (R Load)			
Protection				
Protection Category	Class I			
DC Switch	Yes			
Anti-Islanding Protection	Yes			
AC Over Current Protection	Yes			
AC Over Voltage Protection	Yes			
AC Short Circuit Protection	Yes			
DC Reverse Protection	Yes			
Surge Arrestion	DC Type II, AC Type II			
PV Insulation Resistance Detection	Yes			
Leakage Current Protection	Yes			
AFCI	Optional			
RSD	Optional			
General Data				
Max. Operating Altitude	4000m (>2000m derating)			
Ingress Protection Rating	IP65			
Operating Temperature Range	-25°C~60°C (>45°C derating)			
Relative Humidity	0~100%			
Cooling Method	Natural Cooling			
Mounting Method	Wall bracket			
Advanced Parallel	Up to 9 Pcs			
Dimension (W*H*D)	530mm*550mm*212mm			
Weight	30Kg			32Kg
PV Connection	MC4/H4			
HMI & COM				
Display	LED+APP, LCD (Optional)			
Communication Interface	RS485/CAN (for BMS), RS485, RS485 (for Meter), DRMs, 2*DI (1 for RMO), 2*DO, Optional: Wi-Fi/GPRS/LAN			
Certification				
Grid	VDE-AR-N4105, IEC 61727/62116, AS 4777.2, EN 50549-1, C10/11, G99, CEI 0-21, NRS 097-2-1, RD 1699/661/413			
Safety	IEC 62109-1&2			
EMC	EN 61000			
Warranty	10 Years			
Country of Manufacture	China			

- Remarks:**
- The range of output voltage and frequency may vary depending on different grid codes.
 - Specifications are subject to change without advanced notice.

PrimeX-LV

- CATL LFP Cells Inside
- Supports Charging at -5°C
- Slim & Modern Design
- Outdoor and Indoor Application (IP65)

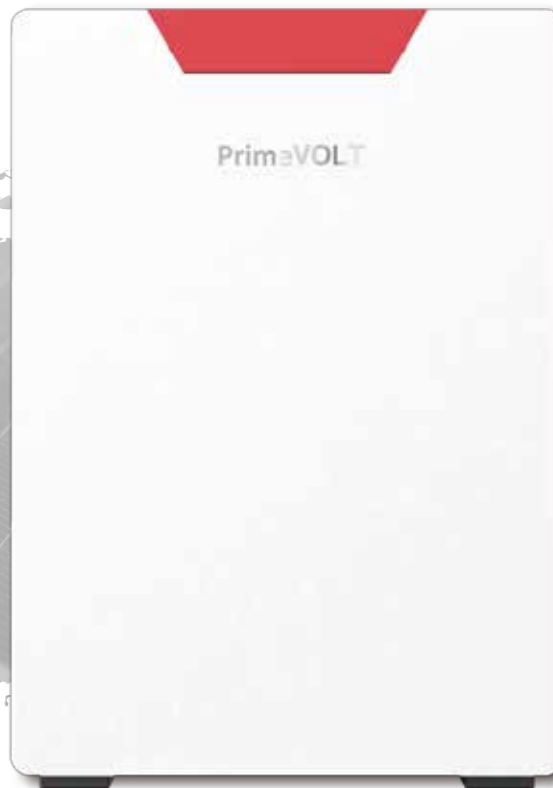

Features

1. Easy Installation
2. Slim & Modern Design
3. Advanced BMS Control
4. Parallel Capacity up to 160 kWh
5. Black Out and Emergency Back-up
6. Self-heating for Low Ambient Temperatures (Optional)
7. Remote Monitoring with Over-the-air Updates (Optional)



PrimeVOLT New Energy Australia Pty Ltd

Email: Info@primevolt.com.au

Address: 41C, Level 3, 650 George Street Sydney NSW 2000, Australia

www.primevolt.com.au

Model	PV 5KBA-L	PV 10KBA-L
Rated Capacity	100 Ah	200 Ah
Rated Voltage	51.2 V	
Rated Energy	5.12 kWh	10.24 kWh
Max. Parallel Quantity	32 Sets in Parallel, 163.84 kWh	16 Sets in Parallel, 163.84 kWh
Rated Charging / Discharging Current	0.6 C, 60 A	0.6 C, 120 A
Max. Discharge Continuous Current	1 C, 100 A at >70% SOC	0.6 C, 120 A
Battery Max. Charge / Discharge Power	3.07 kW / 5.12 kW	6.14 kW / 6.14 kW
Peak Discharge Current / Power	105 A / 5.37 kW, 1 min.	160 A / 8.19 kW, 1 min.
Available SOC Range	0% ~ 100% 90%DOD is Recommended	
Dimensions	Width: 460 (±5) mm, Depth: 165 (±5) mm Height: 652 (±5) mm	Width: 550 (±5) mm, Depth: 165 (±5) mm Height: 869 (±5) mm
Weight	~50 kg (to be Confirmed)	~94 kg (to be Confirmed)
[1*] Operating Temperature	Charging Temperature: -5°C~ 55 °C Discharge Temperature: -15°C~ 55 °C	
[2*] Storage Temperature	- 15 °C ~ 55 °C	
Working Humidity	5 ~ 95% RH (Non-Condensing)	
Altitude	≤ 2000 m	
Communication	CAN / RS485 / Dry Contact / WiFi (WiFi Stick Optional)	
Certification	TÜV / IEC 62619 / IEC 62040 / IEC 61000 / UN38.3 / UL	
Cycle Life	6000	
Warranty	10 Years Limited Warranty	
IP Rating	IP65	

[1*] Recommended Operating Temperature: 10 °C ~ 30 °C

[2*] Recommended Storage Temperature: 10 °C ~ 30 °C